
PSD-14 / Orthopedics

Sterile Bone Traction Pin

Alternative English name: Sterile Orthopedic Traction Pin

A radiation-sterilized orthopedic traction pin in smooth titanium and threaded steel or titanium configurations.

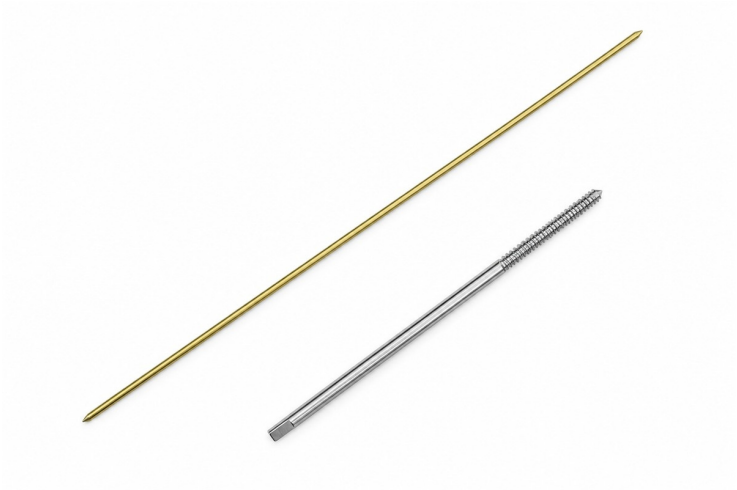

Models & specifications	WQYGT smooth titanium: diameters 0.8mm, 1.0mm, 1.2mm, 1.5mm, 2.0mm, 2.5mm, 3.0mm, 4.0mm, 5.0mm, 6.0mm; lengths 100mm, 150mm, 200mm, 250mm, 300mm. WQYLS threaded steel / WQYLT threaded titanium: diameters 2.0mm, 2.5mm, 3.0mm, 4.0mm, 5.0mm, 6.0mm; lengths 60mm, 65mm, 70mm, 75mm, 80mm, 85mm, 90mm, 95mm, 100mm, 110mm, 120mm, 130mm, 140mm, 150mm, 160mm, 170mm, 180mm, 190mm, 200mm, 210mm; thread lengths 10mm, 15mm, 20mm, 25mm, 30mm, 35mm, 40mm, 45mm, 50mm; pitches 0.75mm, 1.0mm, 1.25mm, 1.75mm, 2.75mm, 3.0mm. Request the model table for exact combinations.
Composition	00Cr18Ni14Mo3 stainless steel or TC4 titanium alloy, depending on model.
Intended use	Temporary reduction and traction for external fracture fixation during orthopedic surgery.
Sterile supply / processing	Sterile — irradiation
Shelf life	3 years. Refer to the supplied labeling for the reference date.
Packaging	Paper/plastic composite pouch and paperboard box; 5 pins/box.

Edward Fu / Export Manager
sales@pushida-medical.com
+86 180 3286 0268
Hebei Pushida Medical Devices Co., Ltd.

WhatsApp